

**530-555W**  
**POWER RANGE**

**HounenSolar**

## HNM7-SHDB144 Series

Hounen Solar 10BB HALF-CELL Bifacial  
Monocrystalline P - TYPE Solar Module

### KEY FEATURES



#### Excellent Cells Efficiency

MBB technology reduce the distance between busbars and finger grid line which is benefit to power increase.



#### Anti PID

Ensured PID resistance through the quality control of cell manufacturing process and raw materials.



#### Bifacial Technology

Up to 25% additional power gain from back side depending on albedo.




#### Better Weak Illumination Response

More power output in weak light condition, such as haze, cloudy, and early morning.




#### Adapt To Harsh Outdoor Environment

Resistant to harsh environments such as salt, ammonia, sand, high temperature and high humidity environment.

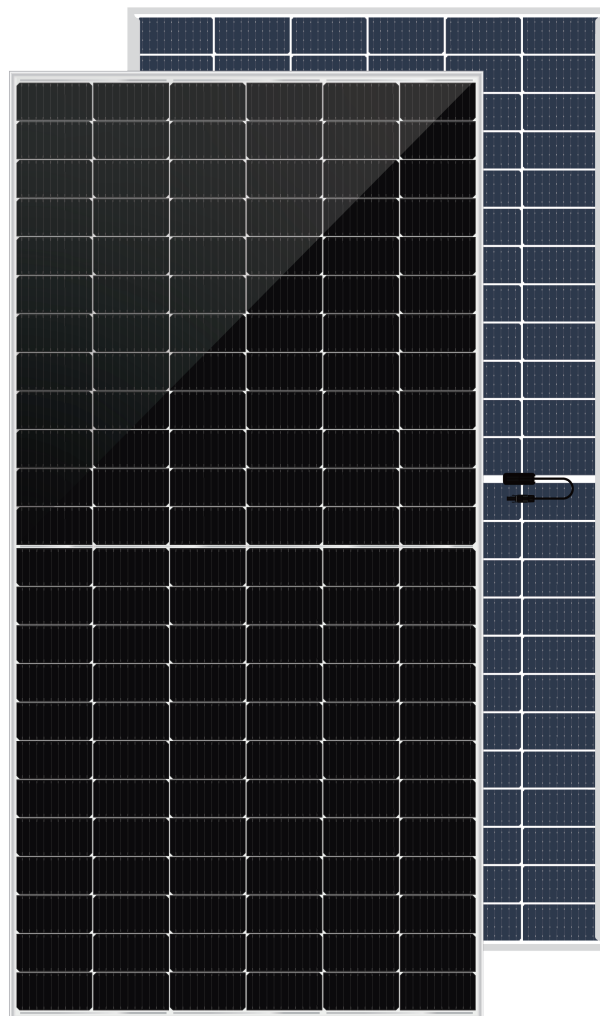

### LINEAR PERFORMANCE WARRANTY

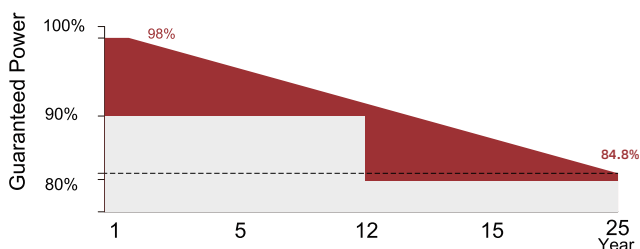

IEC61730, UL61730  
ISO9001:2015: Quality Management System  
ISO14001:2015: Environment Management System  
ISO45001:2018 Occupational health and safety management systems



**12 YEARS PRODUCT WARRANTY**



**25 YEARS OUTPUT GUARANTEE**

555W

MAXIMUM POWER OUTPUT


21.48%

MAXIMUM EFFICIENCY

70±5%


BIFACIALITY

## DIMENSIONS OF PV MODULE(mm)

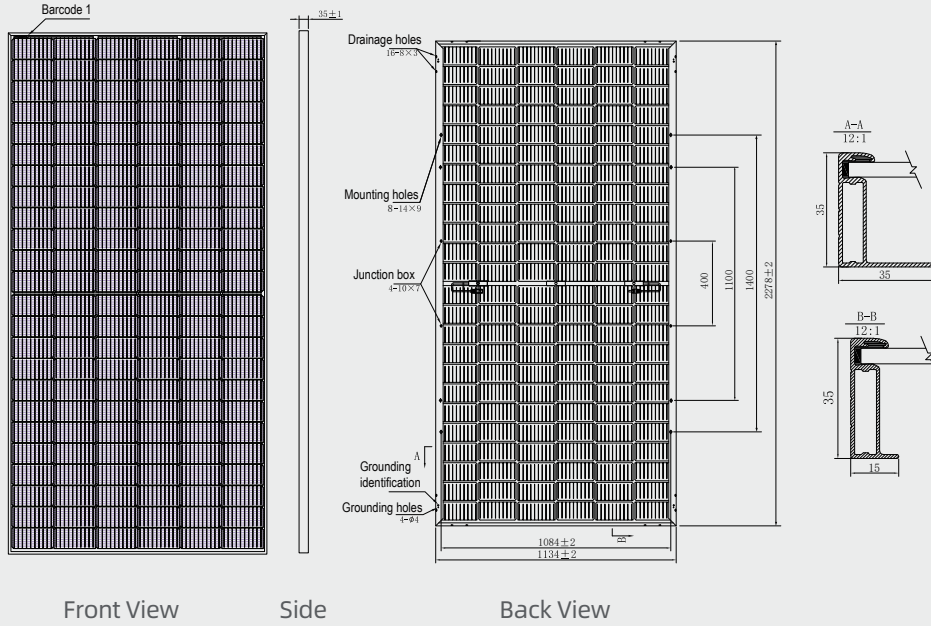


\*Remark: customized frame color and cable length available upon request.

## I-V CURVES OF PV MODULE(530W)

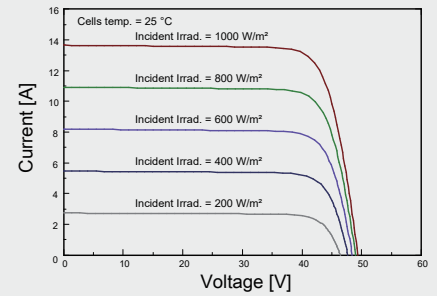

## P-V CURVES OF PV MODULE(530W)

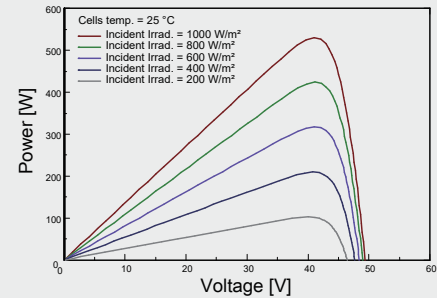

## ELECTRICAL CHARACTERISTICS

Module Type	HNM7-SHDB144-530/M		HNM7-SHDB144-535/M		HNM7-SHDB144-540/M		HNM7-SHDB144-545/M		HNM7-SHDB144-550/M		HNM7-SHDB144-555/M	
STC/NMOT	STC	NMOT	STC	NMOT	STC	NMOT	STC	NMOT	STC	NMOT	STC	NMOT
Nominal Power Watt Pmax(W)*	530	396.40	535	399.90	540	403.60	545	406.80	550	410.80	555	414.60
Maximum Power Voltage Vmp(V)	41.10	38.20	41.30	38.40	41.50	38.50	41.70	38.80	41.90	38.90	42.10	39.10
Maximum Power Current Imp(A)	12.91	10.38	12.96	10.42	13.02	10.47	13.07	10.49	13.13	10.56	13.19	10.61
Open Circuit Voltage Voc(V)	49.40	46.20	49.60	46.30	49.80	46.50	50.00	46.70	50.20	46.90	50.40	47.10
Short Circuit Current Isc(A)	13.65	11.02	13.71	11.07	13.77	11.12	13.83	11.17	13.89	11.22	13.95	11.27
Module Efficiency (%)	20.52		20.71		20.90		21.10		21.29		21.48	

\*STC (Standard Test Condition): Irradiance 1000W/m², Module Temperature 25±2°C, AM 1.5.

\*NMOT: Irradiance 800W/m², Ambient Temperature 20°C, AM 1.5, Wind Speed 1m/s.

## BIFACIAL OUTPUT-REARSIDE POWER GAIN

Maximum Power (Pmax)	557Wp	562Wp	567Wp	572Wp	578Wp	583Wp
5%						
Maximum Efficiency STC (%)	21.56%	21.76%	21.95%	22.14%	22.37%	22.57%
Maximum Power (Pmax)	610Wp	615Wp	621Wp	627Wp	633Wp	638Wp
15%						
Maximum Efficiency STC (%)	23.61%	23.81%	24.04%	24.27%	24.50%	24.70%
Maximum Power (Pmax)	663Wp	669Wp	675Wp	681Wp	688Wp	694Wp
25%						
Maximum Efficiency STC (%)	25.67%	25.90%	26.13%	26.36%	26.63%	26.87%

## MECHANICAL DATA

Solar cells	Mono P-Type
Cells orientation	144 (6x24)
Module dimension	2278x1134x35 (With Frame)
Weight	28±1Kg
Glass	3.2mm, High Transmission, AR Coated Tempered Glass
Junction Box	IP68, 3 diodes
Cables	4 mm², 1200mm (With Connectors)
Connectors	MC4

\*Please refer to regional datasheet for specified connector.

## WORKING CONDITIONS

Maximum System Voltage	1500VDC
Operating Temperature	-40°C~+85°C
Maximum Fuse Rating	30A
Rear Side Mechanical Load	2400Pa
Front Side Mechanical Load	5400Pa
Safety Class	Class II

## TEMPERATURE RATINGS

NMOT	44°C±2°C
Temperature coefficient of Pmax	-0.35%/°C
Temperature coefficient of Voc	-0.29%/°C
Temperature coefficient of Isc	0.05%/°C
Refer. Bifacial Factor	70±5%

## PACKAGING CONFIGURATION

Container	40'HQ
Piece/Box	31

\*Customized packaging is available upon request.

Revised in Sep 2023 1st Edition.  
Specifications included in this datasheet are subject to change without notice.  
Hounen Solar reserves the right of final interpretation.